

THE COMMISSIONER OF PATENTS AND TRADEMARKS, Washington, D.C. 20231

Enclosed for filing is the patent application of Inventor(s):
KARS-MICHIEL H. LENSSEN, MARC E.C. LAMBRECHTS, GERARDUS J.J. VOS

For: INPUT DEVICE

ENCLOSED ARE:

- ☒ Appointment of Associates;
☐ Information Disclosure Statement, Form PTO-1449 and copies of documents listed therein;
☒ Preliminary Amendment;
☒ Specification (16 Pages of Specification, Claims, & Abstract);
☒ Declaration and Power of Attorney:
 (2 Pages of a ☒ fully executed ☐ unsigned Declaration);
☒ Drawing (3 sheets of ☐ informal ☒ formal sheets);
☒ Certified copy of EUROPEAN application Serial No. 97202104.2;
☒ Authorization Pursuant to 37 CFR §1.136(a)(3)
☐ Other: ;
☒ Assignment to U.S. Philips Corporation.

FEE COMPUTATION

| CLAIMS AS FILED | | | | |
|-----------------------------------|--------------|--------------|----------|-------------------------|
| FOR | NUMBER FILED | NUMBER EXTRA | RATE | BASIC FEE - \$790.00 |
| Total Claims | 10 - 20 = | 0 | X \$22 = | 0.00 |
| Independent Claims | 2 - 3 = | 0 | X \$82 = | 0.00 |
| Multiple Dependent Claims, if any | | | \$270 = | 0.00 |
| TOTAL FILING FEE | | | | = \$790.00 |

Please charge Deposit Account No. 14-1270 in the amount of \$790.00, the total filing fee indicated above, plus any deficiencies. The Commissioner is also hereby authorized to charge any other fees which may be required, except the issue fee, or credit any overpayment to Account No. 14-1270.

☐ Amend the specification by inserting before the first line as a centered heading --Cross Reference to Related Applications--; and insert below that as a new paragraph --This is a continuation-in-part of application Serial No. , filed .--, which is herein incorporated by reference--.

CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label No. EM 402815358 U.S.
 Date of Deposit July 1, 1998
 I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Valerie T. Deas
 Typed Name

Valerie T. Deas
 Signature

Edward W. Goodman
 Edward W. Goodman, Reg. 28,613
 Attorney
 (914) 333-9611
 U.S. Philips Corporation
 580 White Plains Road
 Tarrytown, New York 10591
 S:\GO\MV21GOA0.DS0

07/01/98

JCS87 U.S. PTO

JCS558 U.S. PTO

09/108643

07/01/98

09103643 070198

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of
KARS-MICHIEL H. LENSSEN ET AL.

Atty. Docket
PHN 16,435

Serial No.

Group Art Unit

Filed: CONCURRENTLY

Examiner:

Title: INPUT DEVICE

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

APPOINTMENT OF ASSOCIATES

Sir:

The undersigned Attorney of Record hereby revokes all prior appointments (if any) of Associate Attorney(s) or Agent(s) in the above-captioned case and appoints:

EDWARD W. GOODMAN

(Registration No. 28,613)

c/o U.S. PHILIPS CORPORATION, Intellectual Property Department, 580 White Plains Road, Tarrytown, New York 10591, his Associate Attorney(s)/Agent(s) with all the usual powers to prosecute the above-identified application and any division or continuation thereof, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

ALL CORRESPONDENCE CONCERNING THIS APPLICATION AND THE LETTERS PATENT WHEN GRANTED SHOULD BE ADDRESSED TO THE UNDERSIGNED ATTORNEY OF RECORD.

Respectfully,


Alvy Tamoshunas, Reg. 27,677
Attorney of Record

Dated at Tarrytown, New York
this April 21, 1998.

C:\DOCS\VALERIE\APPASOC.GO

20250424 14:58:00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

KARS-MICHIEL H. LENSSEN ET AL.

PHN 16,435

SERIAL NO.:

GROUP ART UNIT:

FILED: CONCURRENTLY

EXAMINER:

INPUT DEVICE

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

PRELIMINARY AMENDMENT

Prior to calculating the filing fee and examination,
please amend the above-identified application as follows:

IN THE SPECIFICATION

Page 1, before line 1, insert as a centered heading

--BACKGROUND OF THE INVENTION--;

after the heading, insert at the left margin

--Field Of The Invention--;

line 3, delete "a measuring step";

line 5, delete "a control step";

between lines 12 and 13, insert at the left margin

--Description Of The Related Art--;

line 18, change "after an analogue to digital conversion"

to --, after analog-to-digital conversion,--;

line 20, change "respectively" to --, respectively,--;

between lines 22 and 23, insert as a centered heading

--SUMMARY OF THE INVENTION--;

line 24, after "achieved" insert --,-- (comma);

line 25, after "invention" insert --,-- (comma);

change "characterised" to --characterized--;

change "includes a" to --includes--;

line 26, delete "calculation step";

Page 2, line 13, change "as such" to --, as such,--;

line 16, after "changes" insert --,-- (comma);

lines 27 and 30, delete "defined in";

line 28, change "Claim 2." to --characterized in that the
calculating step further includes calculating a
second signal on the basis of at least two of the
plurality of components, at least one of the at
least two of the plurality of components being
different from the at least two components for
calculating the first signal, the second signal
representing translation movement of the
graphical element in a second direction on the
display.--;

line 31, change "Claim 3. The initialisation" to
--characterized in that the controlling step
includes an initialization step of measuring
reference values of the plurality of components
with respect to an orientation of the input
device at an instant of executing the

initialization step, and wherein the calculating step calculates the first signal on the basis of a difference between current values and the reference values of respective ones of the at least two of the plurality of components. The initialization--;

line 33, change "for example" to --, for example,--;

line 34, change "centre" to --center--;

Page 3, lines 1, 31 and 34, change "centre" to --center--;

lines 2, 4 and 6, change "initialisation" to --initialization--;

lines 3, 5 and 6, after "e.g." insert --,-- (comma);

line 8, delete "defined in";

line 9, change "Claim 5. Such" to --characterized in that the magnetic field is generated by a permanent magnet or an electromagnet. Such a--;

line 14, after "achieved" insert --,-- (comma);
after "invention" insert --,-- (comma);

line 15, change "characterised" to --characterized--;

line 20, change "display and" to --display, and--;

line 22, after "device" insert --,-- (comma);

line 25, delete "defined";

line 26, change "in Claim 8." to --characterized in that the input device further comprises reset means for measuring reference data of the plurality of sensors with respect to the orientation of the

input device, and wherein the calculating means
is arranged for calculating the first signal on
the basis of a difference between current data
and the reference data of respective ones of the
at least two of the plurality of sensors.--;

line 26, after "means" insert --,-- (comma);

line 33, change "centre," to --center,--;

Page 4, lines 5 and 9, delete "defined";

line 6, change "in Claim 9." to --characterized in that
at least one of the plurality of sensors is an MR
(magnetoresistive) sensor.--;

line 10, change "in Claim 10." to --characterized in that
two of the plurality of sensors comprise an MR
sensor and wherein a third of the plurality of
sensors comprises a Hall sensor, the three
sensors being manufactured on a single
substrate.--;

lines 17 and 21, after "e.g." insert --,-- (comma);

line 24 and 25, delete in their entirety;

between lines 25 and 26, insert as a centered heading

--BRIEF DESCRIPTION OF THE DRAWINGS--;

line 27, change "whereby:" to --in which:--;

lines 29, 32 and 34, change "invention," to
--invention;--;

line 30, after "movement" insert --,-- (comma);

after "invention" insert --,-- (comma);

line 31, change "display," to --display;--;

Page 5, line 2, change "substrate," to --substrate;--;

between lines 6 and 7, insert as a centered heading

--DESCRIPTION OF THE PREFERRED EMBODIMENTS--;

line 28, change "would be" to --is--;

line 30, after "result" insert --,-- (comma);

after "way" insert --,-- (comma);

line 31, after "So" insert --,-- (comma);

Page 7, lines 6, 15 and 24, after "e.g." insert --,-- (comma);

line 13, after "movement" insert --,-- (comma);

after "invention" insert --,-- (comma);

line 24, change "centre" to --center--;

line 25, after "value" insert --,-- (comma);

Page 8, line 1, before "element" insert --signal value and the

graphical--;

change "When" to --Alternatively, when--;

lines 2 and 18, after "e.g." insert --,-- (comma);

line 6, after "device" insert --,-- (comma);

line 7, after "invention" insert --,-- (comma);

line 17, delete "an";

line 19, change "the centre" to --, the center--;

line 20, change "display or" to --display, or--;

line 23, change "defining" to --define--;

line 25, change "realised" to --realized--;

line 28, change "that" to --this--;

Page 9, line 11, after "i.e." insert --,-- (comma);

line 16, after "e.g." insert --,-- (comma);

Page 10, line 20, after "way" insert --,-- (comma);

lines 20 and 32, change "realised" to --realized--;

line 33, after "user" insert --,-- (comma).

IN THE ABSTRACT

Page 14, before line 1, delete in its entirety, and insert as a
centered heading

--ABSTRACT OF THE DISCLOSURE--;

line 1, change "comprises" to --includes--;

after line 6, delete in its entirety.

IN THE CLAIMS

Please amend the claims as follows:

1. (Amended) A method for controlling a graphical element on a display through manipulation of an input device, the method comprising:

[-] [a measuring step] measuring a plurality of components of a magnetic field related to an orientation of the input device[,]; and

[-] [a control step] controlling the graphical element on the basis of the plurality of components,

[characterised] characterized in that the [control] controlling step includes [a calculation step] calculating a first signal on the basis of at least two of the plurality of components, the first signal representing a translation movement of the graphical element in a first direction on the display.

2. (Amended) A method as claimed in Claim 1, wherein the [calculation] calculating step further [includes] comprises calculating a second signal on the basis of at least two of the plurality of components, at least one of the at least two of the plurality of components being different from the at least two components used for calculating the first signal, the second signal representing a translation movement of the graphical element in a second direction on the display.

3. (Amended) A method as claimed in Claim 1, wherein the [control] controlling step includes an [initialisation] initialization step for measuring reference values of the plurality

of components with respect to [the] an orientation of the input
5 device at [the] an instant of executing the [initialisation]
initialization step, and wherein the calculating step calculates
the first signal on the basis of a difference between current
values and the reference values of respective ones of the at least
two of the plurality of components.

4. (Amended) A method as claimed in Claim 3, wherein in said
initialization step the measuring step measures three components of
the magnetic field [thus measuring] resulting in a measurement of
the strength of the magnetic field, and wherein the
5 [initialisation] initialization step is executed if the difference
in strength of the magnetic field, between two successive
executions of the measuring step, is larger than a predetermined
threshold.

5. A method as claimed in Claim 1, wherein the magnetic field
is generated by a permanent magnet or an electromagnet.

6. (Amended) An input device for controlling a graphical
element on a display, the input device comprising:

[-] a plurality of sensors for measuring respective components
of a magnetic field related to an orientation of the input

5 device[,]; and

[-] a controller for controlling the graphical element on the
basis of the plurality of components,

[characterised] characterized in that the controller includes calculation means for calculating a first signal on the basis of data from at least two of the plurality of sensors, the first signal representing a translation movement of the graphical element in a first direction on the display.

7. (Amended) An input device as claimed in Claim 6, wherein the calculation means [are] further [arranged for calculating] calculates a second signal on the basis of data from at least two of the plurality of sensors, at least one of the at least two of the plurality of sensors being different from the at least two sensors [for] used in calculating the first signal, the second signal representing a translation movement of the graphical element in a second direction on the display.

8. (Amended) An input device as claimed in Claim 6, wherein said input device further [comprising] comprises reset means for measuring reference data of the plurality of sensors with respect to [the] an orientation of the input device, and wherein the calculating means [are arranged for calculating] calculates the first signal on the basis of a difference between current data and the reference data of respective ones of the at least two of the plurality of sensors.

9. An input device as claimed in Claim 6, wherein at least one of the plurality of sensors is an MR (magnetoresistive) sensor.

10. (Amended) An input device as claimed in Claim 6, wherein two of the plurality of sensors comprise an MR sensor, and wherein a third of the plurality of sensors comprises a Hall sensor, the three sensors being manufactured on a single substrate.


REMARKS

The specification has been amended in various places to correct typographical and grammatical errors. The specification has also been amended to add section headings.

The claims have been amended to more clearly define the invention as disclosed in the written description. In particular, the claims have been amended for clarity.

When the Examiner takes this case up for examination, it is respectfully requested that this Preliminary Amendment be taken into consideration.

Respectfully submitted,

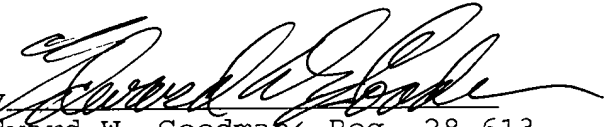by 
Edward W. Goodman, Reg. 28,613
Attorney
Tel.: 914-333-9611

Input device.

The invention relates to a method for controlling a graphical element on a display through manipulation of an input device, the method comprising:

- a measuring step measuring a plurality of components of a magnetic field related to an orientation of the input device, and
- 5 - a control step controlling the graphical element on the basis of the plurality of components.

The invention further relates to an input device for controlling a graphical element on a display, the input device comprising:

- a plurality of sensors for measuring respective components of a magnetic field
- 10 related to an orientation of the input device, and
- a controller for controlling the graphical element on the basis of the plurality of components.

Such a method and input device are described in United States Patent 5,394,028. According to the known method, the orientation of an input device is determined

15 by measuring the magnetic field at the position of the input device. This magnetic field may be the earth's geomagnetic field or a local magnetic field. The input device has three mutually orthogonal groups of Hall sensors, one for each direction of the magnetic field. The output of each of the groups is amplified and after an analogue to digital conversion sent to a computer as three separate signals. Each of the three signals represents a respective

20 component of the magnetic field and the signals represent respectively the pitch, the roll and the yaw of the input device. The known system controls computer graphics on a display in accordance with the pitch, roll and yaw signals from the input device.

It is an object of the invention to provide a method of the kind set forth which improves the control of the graphics on the display. This object is achieved according

25 to the invention in a method that is characterised in that the control step includes a calculation step calculating a first signal on the basis of at least two of the plurality of components, the first signal representing translation movement of the graphical element in a first direction on the display. In this way, the method can be applied in moving an indicator to a particular position on the display and, through that action, pointing to a particular object

among a number of objects on the display. The movements of the input device control the movements of the indicator on the display. Pointing to an object may be followed by some confirmation step, selecting the particular object from among the number of objects. The indicator may be a cursor, like an arrow, for pointing to a button on a menu of buttons
5 representing tasks or information items in an application program. The moving indicator may also be implemented as a moving highlight or other indicative measure along a row of selectable objects. Furthermore, the graphical element so controlled may be a more complex object than the indicator. It may be an animated object on the display, like a car or a plane, the translation movement of which is controlled by the translation movement of the input
10 device. The graphical element may also be an animated character that is guided through a virtual world on the display, whereby the guidance includes the translation movement controlled by the input device.

It is known as such to control the position of a cursor on a display through determining the orientation of an input device. United States Patent 5,440,326
15 describes an input device equipped with a gyroscope to sense changes in the orientation of the device. Through these changes a cursor on a computer display is controlled. The gyroscope is driven by a motor requiring a relatively large amount of power. The gyroscope is complicated to manufacture and is relatively expensive. Furthermore, the input device with the gyroscope experiences an intrinsic, continuous drift, resulting in a movement of the
20 cursor on the display while the input device is held still. The input device according to the invention is very different from the known input device of the reference in that it is based on a different principle of sensing its orientation. The orientation of the device according to the invention is determined by measuring the magnetic field around the input device. This avoids the above mentioned drawbacks: the device requires a small amount of power, is easier to
25 manufacture and experiences no drift. Furthermore, the size of the input device according to the invention can be very small compared to the known device.

An embodiment of the method according to the invention is defined in Claim 2. By calculating a second signal for controlling the graphical element in a second direction on the display, full control of the graphical element on the display is possible.

30 An embodiment of the method according to the invention is defined in Claim 3. The initialisation step provides a reference orientation for the input device. Subsequent changes in the orientation of the input device are calculated with respect to this reference position. Such a reference orientation can for example be the orientation of the input device while the user points towards the centre of the display. The actual trigger for

input device while the user points towards the centre of the display. The actual trigger for executing the initialisation step can be chosen from various possibilities. This could be when the device is activated, e.g. switched on or lifted from a resting place, thus immediately providing a reference position. Additionally, or alternatively, the initialisation step could be executed at the request of the user, e.g. through pressing a button arranged for this purpose. Also the execution of the initialisation step could be triggered by an external event, e.g. a sudden disturbance in the magnetic field.

An embodiment of the method according to the invention is defined in Claim 5. Such generated field can be designed to be stronger than the permanent geomagnetic field. The orientation of the input device can then be detected in a more reliable manner, which is less susceptible to disturbances.

It is a further object of the invention to provide an input device of the kind set forth which allows improved control of the graphics compared to the known input device. This object is achieved according to the invention in an input device which is characterised in that the controller includes calculation means for calculating a first signal on the basis of data from at least two of the plurality of sensors, the first signal representing translation movement of the graphical element in a first direction on the display. The input device according to the invention allows the control of a graphical element on the display. This can be used for pointing and selecting objects from among a plurality of objects on the display and for controlling an animated object or character on the display. Furthermore, the input device according to the invention is less sensitive to disturbances than the known input device because it combines data from two components of the magnetic field into one control signal. A disturbance in a first one of the components will not be fully passed on to the control signal but will be mitigated by the second one of the components.

An embodiment of the input device according to the invention is defined in Claim 8. Through the reset means a reference orientation of the input device may be determined. The control signal for the graphical element is based on the comparison between a subsequent orientation of the input device and the reference orientation. The reset means may be activated through a dedicated reset button on the device or through a switch that is switched on when the input device is lifted from its rest position. An example is where the user of the input apparatus operates the reset button while pointing towards the centre of the display, thus making that orientation the reference orientation. When the user subsequently points away from the centre, the graphical element on the display will move away from the centre in the same direction as the input device. Additionally, or alternatively to activating

the reset means through a reset button or a switch, the reset means may be activated when a disturbance in the magnetic field is determined. In that way, the disturbance has no erroneous impact on the movement of the indicator and the input device is rendered operational again with a new reference orientation.

5 An embodiment of the input device according to the invention is defined in Claim 9. An MR sensor is a sensitive and suitable sensor for measuring a small magnetic field. This is in particular advantageous if the geomagnetic field is employed in the input device.

10 An embodiment of the input device according to the invention is defined in Claim 10. An MR sensor is sensitive in the plane of the sensor. Two MR sensors can be arranged on a single, flat substrate for measuring the magnetic field in two directions in the plane of the substrate. A Hall sensor is sensitive for the magnetic field perpendicular to the plane of the sensor. The Hall sensor can be arranged on the same substrate as the two MR
15 substrate. So each of the three sensor measures one of the three orthogonal directions of the magnetic field. In an embodiment, each of the sensors is manufactured separately and is subsequently attached to the common substrate at the desired position, e.g. as in a so-called MCM (Multi Chip Module). Later assembly of the input device only requires the single
20 device. An alternative embodiment is where the three sensors are directly manufactured on the same common substrate, e.g. a silicon wafer. The advantages are that only a single manufacturing process is required and that the positioning and alignment of the sensors can easily be realised in that process.

25 Further advantageous embodiments of the invention are recited in dependent claims.

The invention and its attendant advantages will be further elucidated with the aid of exemplary embodiments and the accompanying schematic drawings, whereby:

Figure 1 schematically shows the principle of operation of the input device according to the invention,

30 Figure 2 shows the translation movement according to the invention of a graphical element on the display,

Figure 3 schematically shows an input device according to the invention,

Figure 4 schematically shows an alternative embodiment of the input device according to the invention,

Figure 5 schematically shows an arrangement of the sensors of the input device on a single substrate, and

Figure 6 shows an overview of the arrangement of the input device using a magnet for generating the magnetic field.

5 Corresponding features in the various Figures are denoted by the same reference symbols.

Figure 1 schematically shows the principle of operation of the input device according to the invention. The input device 100 is arranged to measure the three orthogonal components of magnetic field 102. This magnetic field may be the geomagnetic
10 field of the earth or a local magnetic field, specifically generated by the input device. The input device comprises a sensor 104 for measuring the H_x component 106, a sensor 108 for measuring the H_y component 110 and a sensor 112 for measuring the H_z component 114. The sensors in Figure 1 are implemented as AMR (anisotropical magnetoresistive) sensors by way of example. Other types of sensors are also feasible. The sensors produce a signal that
15 is proportional to the respective measured component of the magnetic field. The value of the output signal for a given magnetic field depends on the construction of the sensor and may be different among the three sensors. An MR sensor is sensitive to a magnetic field in a particular direction in the plane of the sensor and produces a signal that is proportional to the magnetic field in that direction. The signal V_x of sensor 104 is proportional to the strength of
20 the H_x component of the magnetic field, the signal V_y of sensor 108 is proportional to the strength of the H_y component of the magnetic field, and the signal V_z of sensor 112 is proportional to the strength of the H_z component of the magnetic field. The output signals will be further processed and used to control a graphical element on the display of the system for which the input device is operative. When the orientation of the input device changes to a
25 new position, the three sensors and the shown co-ordinate system will take a new position with respect to the magnetic field 102. In dependence on the change of orientation, the measured components will change, resulting in new output signals from which the new position can be calculated. If the magnetic field would be produced by a local magnet, the orientation of the magnetic field with respect to the input device may also be changed by
30 changing the orientation of the local magnet. This will result in a similar way to new output signals obtained from the sensors. So in the case of a magnetic field that is locally generated, as opposed to the magnetic field of the earth, there is a design choice for the input device for changing the orientation of the magnetic field with respect to the sensors. The part of the input device generating the magnetic field may be stationary and the part with the sensors

freely movable, or the part with the sensors may be stationary and the part generating the field freely movable.

The input device of Figure 1 provides three sensor output signals carrying the information on the orientation of the input device with respect to the magnetic field.

- 5 According to the invention, these three sensor output signals are reduced to two signals representing translation movement of a graphical element on the display. A simple way of calculating the two signals is given in the following formulae:

$$X = \sin \left(\arctan \frac{V_y}{V_x} \right) = \frac{\frac{V_y}{V_x}}{\sqrt{1 + \frac{V_y^2}{V_x^2}}} = \frac{V_y}{\sqrt{V_x^2 + V_y^2}} \quad (1)$$

10

$$Y = \sin \left(\arctan \frac{V_z}{V_x} \right) = \frac{\frac{V_z}{V_x}}{\sqrt{1 + \frac{V_z^2}{V_x^2}}} = \frac{V_z}{\sqrt{V_x^2 + V_z^2}} \quad (2)$$

In this embodiment, an additional sine-function has been applied for obtaining the X-signal and the Y-signal. An alternative calculation would be to omit the sine-function. Furthermore,

- 15 respective scale factors may be applied in the formulae in order to obtain an appropriate scale for the translation movement of the graphical element on the display.

In an alternative embodiment, the X-signal and the Y-signal are calculated with respect to a reference orientation of the input device. To this end, the input device is reset in the desired reference orientation and the respective output signals V_{x0} , V_{y0} and V_{z0} of the sensors are determined and stored for subsequent calculations. The X-signal and the

20 Y-signal are then obtained according to the following formulae:

$$X = \frac{V_{x0}V_y - V_{y0}V_x}{\sqrt{V_x^2 + V_y^2} \cdot \sqrt{V_{x0}^2 + V_{y0}^2}} \quad (3)$$

$$Y = \frac{V_{x0}V_z - V_{z0}V_x}{\sqrt{V_x^2 + V_z^2} \cdot \sqrt{V_{x0}^2 + V_{z0}^2}} \quad (4)$$

- 5 In cases where the overall strength of the magnetic field is substantially the same for different positions of the input device, e.g. in the case of the geomagnetic field, the formulae (3) and (4) can be reduced to:

$$X = \frac{V_{x0}V_y - V_{y0}V_x}{V_x^2 + V_y^2} \quad (5)$$

10

$$Y = \frac{V_{x0}V_z - V_{z0}V_x}{V_x^2 + V_z^2} \quad (6)$$

Figure 2 shows the translation movement according to the invention of a graphical element on the display. On a display 202 a graphical element 204 is displayed.

- 15 This graphical element may be implemented as cursor, e.g. in the form of an arrow, cross or other symbol. However the cursor may also be implemented as some highlight moving across objects on the display, whereby the particular object is highlighted which is being pointed to. Furthermore, the graphical element may be a more complex image representing an object on the display. The graphical element 204 is moved in the horizontal direction 206
- 20 in response to the X-signal 208 and is moved in the vertical direction 210 in response to the Y-signal 212. The actual movement in a certain direction in response to the respective signal may be implemented in different ways. It is possible that the graphical element assumes a position along that direction in direct proportion to the signal. When the signal is zero, the graphical element is at its reference position, e.g. the centre of the display, and when the
- 25 signal has a certain value the graphical element assumes a position corresponding to that

element remains at its latest position along the respective direction. When the signal has a certain value it moves with a certain speed, e.g. in proportion to the value of the signal, and does so until the signal value changes. In this implementation the input device operates similar to an accelerator pedal and the actual position of the graphical element has no

5 correspondence to the actual signal value.

The X-signal and Y-signal generated by the input device according to the invention are representing respective translation movements. How these signals are exploited in an application running on the system to which the input device is connected, is determined by the specific application. The application may exploit the signal to control the translation

10 movement of the graphical element in one of the ways described above. However, the application may also use the signal to generate a different, potentially more complex movement of the graphical element.

The input device according to the invention may have a reset function providing a new reference orientation for the movements of the graphical element. Resetting

15 the input device may involve two separate actions. The output values corresponding to the orientation at the moment of the reset are determined and stored for subsequent measurements. These values are then used as an offset values in the subsequent calculations. Furthermore, resetting the input device may move the graphical element, e.g. the cursor, to a predetermined reference position, for example the centre of the display, the upper left

20 corner of the display or at the first object of a row of objects on the display. In order to execute the reset function, the input device may be provided with a dedicated reset button to be operated by the user of the device. When the user holds the input device with a suitable orientation, he may operate the reset function and in that way defining this suitable orientation as the reference orientation. The reset function may also be executed when the

25 input device is activated. This can be realised as a switch which is activated when the user lifts the input device from its rest position. The reset function may also be executed automatically in case of a disturbance resulting in a relative large change in the overall strength of the magnetic field. The input device of that embodiment monitors the strength of the magnetic field and when this differs too much from the reference values, the reset

30 function is executed again. To this end, it is determined whether one of the following conditions is fulfilled:

$$V_x^2 + V_y^2 + V_z^2 > (1+\delta) \cdot (V_{x0}^2 + V_{y0}^2 + V_{z0}^2) \quad (7)$$

$$V_x^2 + V_y^2 + V_z^2 > (1+\delta) \cdot (V_{x0}^2 + V_{y0}^2 + V_{z0}^2) \quad (7)$$

$$V_x^2 + V_y^2 + V_z^2 < (1-\delta) \cdot (V_{x0}^2 + V_{y0}^2 + V_{z0}^2) \quad (8)$$

- 5 In these formulae, the symbol δ defines a threshold for the allowable variation in the strength of the magnetic field.

In the example in Figures 1 and 2, the two components of the magnetic field from which the signal for controlling the graphical element are calculated, are orthogonal components. This is not necessary for application of the invention and the two components may have a different mutual angle. It is a sufficient condition that the two components are not dependent to each other, i.e. that they do not completely extend in the same direction. The combination of two components into a single signal for controlling the translation movement of the graphical element makes the signal less dependent on disturbances in the magnetic field. An error in one the components, due to a disturbance, is not fully passed on to the signal but its effect is mitigated due the other component. This can also be seen from the various formulae for calculating the X-signal or the Y-signal, e.g. formulae (1) and (2)

Figure 3 schematically shows an input device according to the invention. A freely movable handheld part 302 comprises the sensors 104, 108 and 112 and a controller 304 controlling the graphical element on the basis of output signals of the sensors. The input device further comprises calculation means 306 for calculating the X-signal and the Y-signal and reset means 308 for resetting the input device to a reference orientation. The reset means are operated through a switch 310 which may be implemented as a user operable push button or as part of an activation switch activating the device. The device further comprises a storage 312 for storing the output signals of the sensors at the time of a reset, for later use as reference values. The calculated X-signal and Y-signal are transmitted from the handheld part through a transmitter 314 to the stationary part 316 near a display 318 on which the graphical element is to be moved. In the stationary part 316, the signals are received in a receiver 320 and are transferred to the display via interface 322. The transmitter 314 and receiver 320 may be implemented as an infrared sending/receiving device or as a radio-frequency sending/receiving device. Alternatively, the movable part 302 may be connected via a wire to the stationary thus avoiding the need for a transmitter and a receiver. However,

this will limit the movements of the handheld part 302 to a certain extent. In the example shown in Figure 3, most of the elements of the input device reside in the freely movable handheld part 302 and this part transmits the X-signal, the Y-signal and a command for moving the graphical element to the reference position.

5 Figure 4 schematically shows an alternative embodiment of the input device according to the invention. In this embodiment, the handheld part 302 comprises the sensors 104, 108 and 112, the reset switch 310 and the transmitter 314. The other elements now reside in the stationary part 316 of the input device. The handheld part transmits the sensor output signals V_x , V_y and V_z and, if applicable, the fact that the reset switch has been
10 activated to the stationary part.

 Figure 5 schematically shows an arrangement of the sensors of the input device on a single substrate. The input device comprises a substrate 502, for instance of silicon, on which 3 sensors have been assembled. Sensor 504 is an MR sensor which has been made sensitive for measuring a magnetic field in direction 506 and sensor 508 is also
15 an MR sensor, but this one is made sensitive for measuring a field in direction 510. Sensor 512 is a Hall sensor which is sensitive in direction 514, perpendicular to the substrate. So the three sensors can each measure an orthogonal component of the magnetic field through the substrate and can therefore be used as the sensors in the input device according to the invention. It is advantageous to manufacture the three sensors on a single substrate because
20 in this way they can be realised in a single manufacturing step. There is no need to later assemble different substrates, each carrying one or two sensors, together for the manufacture of the input device. The substrate 502 can further comprise the sensor connection wires and additional circuitry 516, implementing the required elements like the controller 304, the calculation means 306, the reset means 308, the storage 312 and the transmitter 314. This
25 further eases the manufacturing process of the input device and reduces the production costs.

 Figure 6 shows an overview of the arrangement of the input device using a magnet for generating the magnetic field. A magnet 602, this may be either a permanent magnet or an electromagnet generates a magnetic field 604. The movable part 302 of the input device has a certain orientation with respect to the magnetic field, resulting in specific values
30 measured by the three sensors. The movable part 302 transmits its signals to the stationary part 316 which delivers the control signal to display 318 for moving the indicator. In an embodiment of the input device according to the invention, the magnet is realised as a bracelet on the wrist of the user and the movable part 302 as a ring on a finger of the corresponding hand. The graphical element on the display is controlled by simple movements

of that finger because the orientation of the movable part 302 then changes with respect to the magnetic field in correspondence with the movements. The function of the bracelet and the ring could simply be interchanged, resulting in the arrangement in which the ring includes a magnet and the bracelet includes the sensor sensing changes of the magnet field.

- 5 Also in this arrangement, the graphical element is controlled through movements of the finger with ring relative to the wrist with the bracelet.

In an alternative embodiment, the magnet 602 is arranged in the stationary part 316, thus forming a single stationary part of the input device. In this embodiment, the input device according to the invention still comprises only two part despite the fact that a
10 magnet is used for generating the magnetic field.

PHN 16.435 22.01.1998

CLAIMS:

1. A method for controlling a graphical element on a display through manipulation of an input device, the method comprising:
- a measuring step measuring a plurality of components of a magnetic field related to an orientation of the input device, and
- 5 - a control step controlling the graphical element on the basis of the plurality of components, characterised in that the control step includes a calculation step calculating a first signal on the basis of at least two of the plurality of components, the first signal representing translation movement of the graphical element in a first direction on the display.
- 10 2. A method as claimed in Claim 1, wherein the calculation step further includes calculating a second signal on the basis of at least two of the plurality of components, at least one of the at least two being different from the at least two components for calculating the first signal, the second signal representing translation movement of the graphical element in a second direction on the display.
- 15 3. A method as claimed in Claim 1, wherein the control step includes an initialisation step measuring reference values of the plurality of components with respect to the orientation of the input device at the instant of executing the initialisation step, and wherein the calculating step calculates the first signal on the basis of a difference between current values and reference values of respective ones of the at least two of the plurality of
- 20 components.
4. A method as claimed in Claim 3, wherein the measuring step measures three components of the magnetic field thus measuring the strength of the magnetic field, and wherein the initialisation step is executed if the difference in strength between two successive executions of the measuring step is larger than a predetermined threshold.
- 25 5. A method as claimed in Claim 1, wherein the magnetic field is generated by a permanent magnet or an electromagnet.
6. An input device for controlling a graphical element on a display, the input device comprising:
- a plurality of sensors for measuring respective components of a magnetic field

related to an orientation of the input device, and

- a controller for controlling the graphical element on the basis of the plurality of components,

characterised in that the controller includes calculation means for calculating a first signal on

5 the basis of data from at least two of the plurality of sensors, the first signal representing translation movement of the graphical element in a first direction on the display.

7. An input device as claimed in Claim 6, wherein the calculation means are further arranged for calculating a second signal on the basis of data from at least two of the plurality of sensors, at least one of the at least two being different from the at least two
10 sensors for calculating the first signal, the second signal representing translation movement of the graphical element in a second direction on the display.

8. An input device as claimed in Claim 6, further comprising reset means for measuring reference data of the plurality of sensors with respect to the orientation of the input device, and wherein the calculating means are arranged for calculating the first signal
15 on the basis of a difference between current data and the reference data of respective ones of the at least two of the plurality of sensors.

9. An input device as claimed in Claim 6, wherein at least one of the plurality of sensors is an MR (magnetoresistive) sensor.

10. An input device as claimed in Claim 6, wherein two of the plurality of
20 sensors comprise an MR sensor and wherein a third of the plurality of sensors comprises a Hall sensor, the three sensors being manufactured on a single substrate.

ABSTRACT:

Input device.

An input device (302,316) comprises a plurality of magnetic sensors (104,108,112) for measuring the components (106,110,114) of a magnetic field (102) at the position of the input device (302). The magnetic field may be the geomagnetic field of the earth or a magnetic field generated by a local magnet (602). The data of at least two
5 (104,108) of the sensors are used for calculating a first signal (208) for controlling the translation movement of a graphical element (204) on a display (202).

Figure 1

CLAIMS (with):

1. A method for controlling graphics on a display (202,318) through manipulation of an input device (100,302), the method comprising:

- a measuring step measuring a plurality of components (106,110,114) of a magnetic field (102) related to an orientation of the input device, and

5 - a control step controlling the graphics on the basis of the plurality of components,

characterised in that the control step includes a calculation step calculating a first signal (208) on the basis of at least two (106,110) of the plurality of components, the first signal (208) controlling translation movement of an indicator (204) in a first direction (206) on the display
10 (202).

2. A method as claimed in Claim 1, wherein the calculation step further includes calculating a second signal (212) on the basis of at least two (106,114) of the plurality of components, at least one (114) of the at least two being different from the at least two components for calculating the first signal, the second signal (212) controlling translation
15 movement of the indicator (204) in a second direction (210) on the display (202).

3. A method as claimed in Claim 1, wherein the control step includes an initialisation step measuring reference values of the plurality of components (106,110,114) with respect to the orientation of the input device (100,302) at the instant of executing the initialisation step, and wherein the calculating step calculates the first signal (208) on the
20 basis of a difference between current values and reference values of respective ones of the at least two (106,110) of the plurality of components.

4. A method as claimed in Claim 3, wherein the measuring step measures three components (106,110,114) of the magnetic field (102) thus measuring the strength of the magnetic field, and wherein the initialisation step is executed if the difference in strength
25 between two successive executions of the measuring step is larger than a predetermined threshold.

5. A method as claimed in Claim 1, wherein the magnetic field (102,604) is generated by a permanent magnet (602) or an electromagnet.

6. An input device (302,316) for controlling graphics on a display, the input

device comprising:

- a plurality of sensors (104,108,112) for measuring respective components of a magnetic field related to an orientation of the input device, and
- a controller (304) for controlling the graphics on the basis of the plurality of

5 components,

characterised in that the controller (304) includes calculation means (306) for calculating a first signal (208) on the basis of data from at least two (104,108) of the plurality of sensors, the first signal (208) controlling translation movement of an indicator (204) in a first direction (206) on the display (202,318).

10 7. An input device (302,316) as claimed in Claim 6, wherein the calculation means (306) are further arranged for calculating a second signal (212) on the basis of data from at least two (104,112) of the plurality of sensors, at least one (112) of the at least two being different from the at least two sensors for calculating the first signal, the second signal (212) controlling translation movement of the indicator (204) in a second direction (210) on
15 the display (202,318).

8. An input device (302,316) as claimed in Claim 6, further comprising reset means (308) for measuring reference data of the plurality of sensors (104,108,112) with respect to the orientation of the input device (302), and wherein the calculating means (306) are arranged for calculating the first signal (208) on the basis of a difference between current
20 data and the reference data of respective ones of the at least two (104,108) of the plurality of sensors.

9. An input device (302) as claimed in Claim 6, wherein at least one (504) of the plurality of sensors is an MR (magnetoresistive) sensor.

10. An input device (302) as claimed in Claim 6, wherein two (504,508) of
25 the plurality of sensors comprise an MR sensor and wherein a third (512) of the plurality of sensors comprises a Hall sensor, the three sensors being manufactured on a single substrate (502).



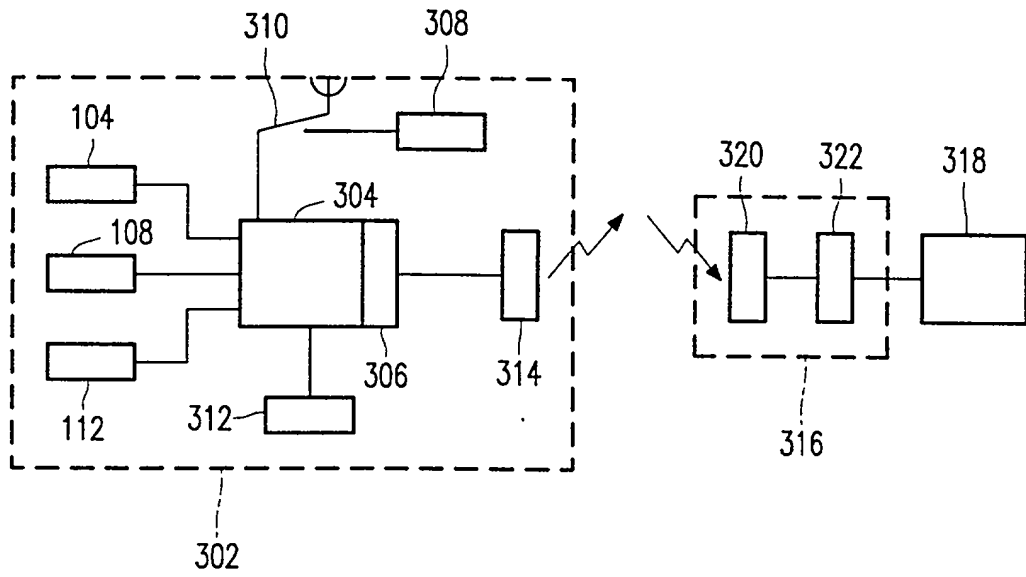


FIG. 3

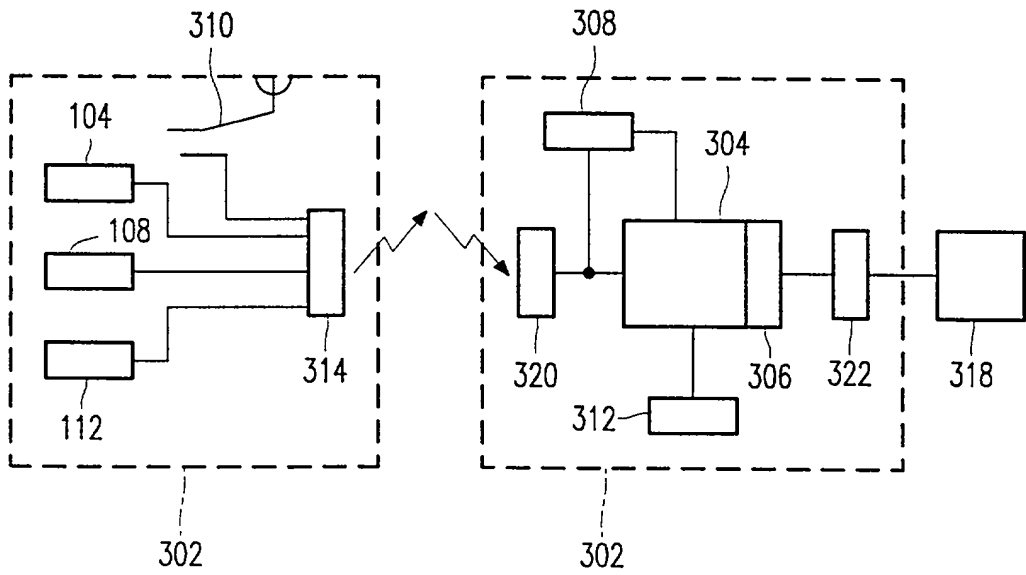


FIG. 4

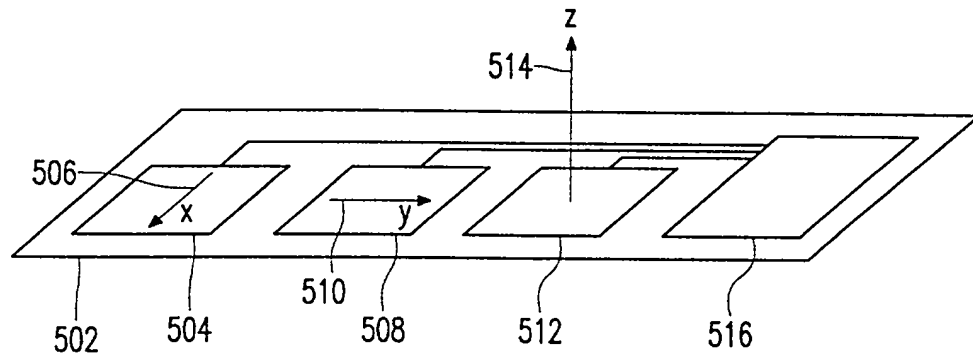


FIG. 5

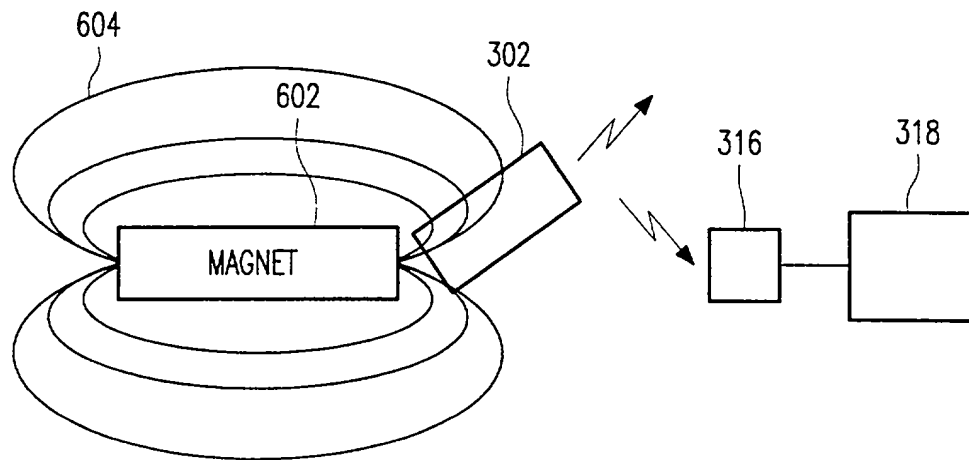


FIG. 6

DECLARATION and POWER OF ATTORNEY

ATTORNEY'S DOCKET NO.:
PHN 16.435

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

"Input device"

the specification of which (check one)

☒ is attached hereto.

☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by the amendment(s) referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

| COUNTRY | APP.NUMBER | DATE OF FILING (DATE,MONTH, YEAR) | PRIORITY CLAIMED UNDER 35 U.S.C. 119 |
|---------|------------|--------------------------------------|--|
| Europe | 97202104.2 | 08 July 1997 | YES |
| | | | |

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR UNITED STATES APPLICATION(S)


| APPLICATION SERIAL NUMBER | FILING DATE | STATUS (PATENTED, PENDING, ABANDONED) |
|---------------------------|-------------|--|
| | | |
| | | |

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Algy Tamoshunas, Reg. No. 27,677
Jack E. Haken, Reg. No. 26,902

| | | | |
|--|----------------------------------|--|--|
| SEND CORRESPONDENCE TO: Corporate Patent Counsel; U.S. Philips Corporation; 580 White Plains Road; Tarrytown, NY 10591 | | DIRECT TELEPHONE CALLS TO: (name and telephone No.) (914) 332-0222 | |
| Dated: May 4, 1998 | | Inventor's Signature: <i>K. M. Lensen</i> | |
| Full Name of Inventor | Last Name LENSSEN | First Name Kars-Michiel | Middle Name H. |
| Residence & Citizenship | City Eindhoven | State or Foreign Country The Netherlands | Country of Citizenship The Netherlands |
| Post Office Address | Street Prof. Holstlaan 6 | City 5656 AA Eindhoven | State or Country The Netherlands Zip Code |
| Dated: May 13, 1998 | | Inventor's Signature: <i>Lambrechts Marc</i> | |
| Full Name of Inventor | Last Name LAMBRECHTS | First Name Marc | Middle Name E.C. |
| Residence & Citizenship | City Leuven | State or Foreign Country Belgium | Country of Citizenship Belgium |
| Post Office Address | Street Interleuvenlaan 76 | City 3001 Leuven | State or Country Belgium Zip Code |

| | | | |
|-------------------------|--------------------------|---|---|
| Dated: May 27, 1998 | | Inventor's Signature:  | |
| Full Name of Inventor | Last Name VOS | First Name Gerardus | Middle Name J.J. |
| Residence & Citizenship | City Eindhoven | State of Foreign Country The Netherlands | Country of Citizenship The Netherlands |
| Post Office Address | Street Prof. Holstlaan 6 | City 5656 AA Eindhoven | State or Country The Netherlands Zip Code |

| | | | |
|-------------------------|-----------|--------------------------|---------------------------|
| Dated: | | Inventor's Signature: | |
| Full Name of Inventor | Last Name | First Name | Middle Name |
| Residence & Citizenship | City | State of Foreign Country | Country of Citizenship |
| Post Office Address | Street | City | State or Country Zip Code |

| | | | |
|-------------------------|-----------|--------------------------|---------------------------|
| Dated: | | Inventor's Signature: | |
| Full Name of Inventor | Last Name | First Name | Middle Name |
| Residence & Citizenship | City | State of Foreign Country | Country of Citizenship |
| Post Office Address | Street | City | State or Country Zip Code |

| | | | |
|-------------------------|-----------|--------------------------|---------------------------|
| Dated: | | Inventor's Signature: | |
| Full Name of Inventor | Last Name | First Name | Middle Name |
| Residence & Citizenship | City | State or Foreign Country | Country of Citizenship |
| Post Office Address | Street | City | State or Country Zip Code |

| | | | |
|-------------------------|-----------|--------------------------|---------------------------|
| Dated: | | Inventor's Signature: | |
| Full Name of Inventor | Last Name | First Name | Middle Name |
| Post Office Address | City | State of Foreign Country | Country of Citizenship |
| Residence & Citizenship | Street | City | State or Country Zip Code |

| | | | |
|-------------------------|-----------|--------------------------|---------------------------|
| Dated: | | Inventor's Signature: | |
| Full Name of Inventor | Last Name | First Name | Middle Name |
| Post Office Address | City | State of Foreign Country | Country of Citizenship |
| Residence & Citizenship | Street | City | State or Country Zip Code |